

Yoosee fast operating guide V1.6

II. Download & install Yoosee APP for phone


Go to Apple APP Store or Android Google Play and search for Yoosee or you can go to www.yoosee.co to download & install Yoosee then finish registration according to the instructions and log in.

III. Add camera


1. Register & log in

App can be registered via phone numbers and e-mail addresses as well as via WeChat.

Note: phone numbers registration is only limited in China currently and also do use true e-mail addresses better for finding forgotten password back in the future.




2. Process of adding new devices



Device needs to be back to initialized status by pressing the reset button for 5 seconds when adding new devices.

Fast network:

Select fast network → waiting for connection → select Wi-Fi → select device GW-AP-XXX (see pic 3.2.4) → connecting → done

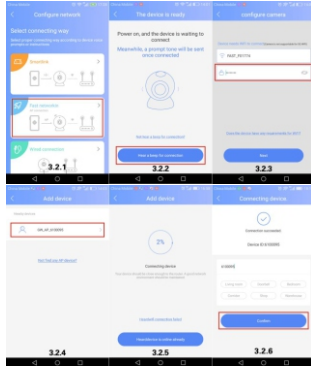

If this is your first time to add this camera, you are the owner of it after adding. You can click on the share button on the right upper corner (see pic 3.2.7) and share to your friends.




It might fail to connect device when using Fast network due to restrictions of some routers, please try wired connection when it fails.

Wired adding

Select wired connection → select wanted device in new device listings → create device name (please input default password manually if device got one) → save


IV. Sharing to friends

1. Click on sharing button and enter into sharing interface (see pic 4.1.2) then share camera to friends, please see below picture.






2. Please ask your friends to install, register and login the latest Yoosee version.
3. How does your friends add sharing camera?

1) If friends nearby.
Ask your friends to open APP → click on scan → scan the QR code → jump to the interface of adding sharing device (see pic 4.2.3) → done.




2) If friends not nearby.

You can share the link to friends by social networking tools (WeChat, Line, WhatsApp is supported), details are as follows:
Click on the link on WeChat → click the button on right upper corner (see pic 4.3.2) → open it via browser → enter into the interface of being invited → jump to the interface of adding sharing device (see pic 4.3.3) → done

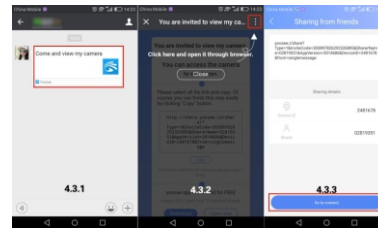


Or you can copy the sharing link and send it to your friends → copy the link manually → open APP → enter into the interface of adding sharing device (see pic 4.4.4), details are as follows:

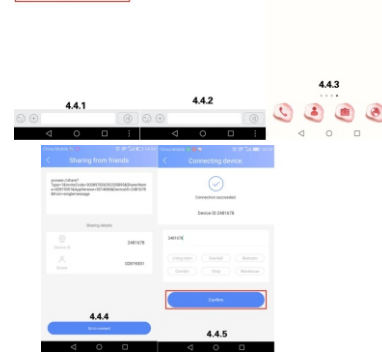


4. Sharing Management


The interface of sharing management will appear when clicking sharing button if this device has been shared to other people, you can delete the shared friends or share it again to other friends. Friends' e-mail address, phone numbers and APP ID can be shown as well.



V. Introduction of function buttons




- ① Scan
- ② Weak password icon: Suggest to revise password when this icon is on.
- ③ Defense succeeded & disarming succeeded: Deploy must be switch on when using alarm notification and alarm recording.
- ④ Video playback
- ⑤ Setting: Red spots will be appeared on settings & firmware update when there is new firmware version needed to be updated.
- ⑥ Sharing



- ① **Remote recording:** Record videos and save it to phone.
- ② **Intercom system:** Press the button and you can talk remotely.
- ③ **Remote capturing:** Capture video screenshot and save it to phone.
- ④ **Volume**
- ⑤ **Video Definition**
- ⑥ **Direction indicator pointer:** Showing direction.
- ⑦ **Monitoring area:** You can slide it up and down (left&right) to control the rotation in the monitoring area.

VI. Settings



Device information: Information about device name, firmware version, LAN IP, Mac address can be checked, details please see below picture:




Time settings: Set devices time and time zone .

Picture and sound: set device video format、volume、video quality、motion detection sensitivity、reverse image、indicator light and so on.

Security settings: RTSP password setting; set or change device adminster password and visitor password. Visitor command will be shown for devices by sharing way.



Defense settings (this function needs device support): Set regular plan of deploying & revoking alarm.

Network settings: Switch to standalone mode (suitable for users without Wi-Fi router); switch between wired & Wi-Fi connection or switch to other Wi-Fi (see below picture)



- **Users without router can access through stand mode of device, details are as follows:**

Let device back to the initialized status→find device named GW-AP-XXX(see pic 6.1.1) & click→click skip, switch to standalone mode(see pic 6.1.2) →confirm→connecting→done(see pic 6.1.4)




Alarm settings: receive alarm prompt、delete alarm pushing account、bound alarm pushing e-mail、buzzer、motion detection and sensitivity.

Record settings: Set record mode—record manually, record alarm, record timer.

Note: motion detection or sensor should be enabled on as well as defense succeeded when using alarm notification and alarm recording.


Add sensor (this function needs device support): Its available to add ordinary sensor (door magnetic, PIR), remoter, special sensor (smoke detector, special gas detector).




Adding methods :click i n add sensor interface→confirm→trigger sensor→add successfully.
Using case: switch on receive alarm prompt in alarm settings after add sensor successfully. And at the same time deploying alarm should be done. Once door magnetic is triggered after deploying alarm successfully, device will send alarm notifications to phone APP.

Firmware update: Update & optimize device firmware.


VII.My



Account information: you can get account information about yoosee and modify your phone/email/login password, details please see below picture:



General settings: General functions can be set freely, details please see below picture:



Notification centers: Notifications sent by official yoosee and activity discount information can be acquired.
Help and feedback: Solve FAQs quickly or you can just give feedback to yoosee team.
About: Information about Yoosee version, new functions, version updates can be acquired.

VIII. FAQ

- ① Q: Notice wrong password when checking real time videos.
A: Device visiting password probably has been changed by other people but you can enter correct remote visiting password in the popup. If you forgot the password, you can press the reset button for a long time and restart.
- ② Q: It shows device is offline in device listing.
A: Please check whether camera is connected with network properly and network indicator light is always on or not.
Please check whether the routers network is fine or not.

③ Q: What shall we do if phone APP cant get any notifications?
A: Check whether alarm items & alarm notifications in alarm settings are switched on and make sure you have deployed alarm successfully. Also whether android background have been prohibited or not by SafeMgr.

④ Q: What shall we do if motion detection gives misinformation?
A: Update device firmware (above 14.0.07.76) and APP (above 00.46.00.13) so that you can adjust motion detection sensitivity in APP settings or revise configuration files md_level = 3(1~6, the smaller, the more sensitive)

⑤ Q: Recorded videos files cant be searched out on playback.
A: Please check whether SD card is damaged or not.
Please check the search time of recorded files and system time of camera.

⑥ Q: Camera cant connect with Wi-Fi.
A: Confirm the input password is correct.
Camera is not supported for 5G Wi-Fi, please connect with 2.4G Wi-Fi.
Some items restricted on Wi-Fi access such as AP isolation, Wi-Fi Zone and etc. should be closed.

⑦ Q: AP devices cant be found on Phone Wi-Fi list.
A: Firmware is not supported for this function.
The distance is too far from phone to device.

IX. Acquire more information

This fast guidance will guide you to use your network camera in a very fast way. If you want to acquire more information, please download detailed user guidance or ask technical support from manufacturer.