

REV. 版本	ECN NO. 变更单号	DESCRIPTION 变更说明	DATE 日期
01	ECR16052401		2016.09.23

SALT SPRAY		
G/F	NA	
3u 6u	24H	
15u 30u 50u	48H	

SPECIFICATION NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 150 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 20mΩ MAX.
4. INSULATION RESISTANCE: 1000MΩ MIN. AT 500V DC.
5. 1000V D.C. or A.C. PEAK;ONE CONTACT TO ALL OTHER CONTACTS CONNECTED TOGETHER. 1500V D.C. OR A.C. PEAK;ALL CONTACTS CONNECTED TOGETHER TO SHIELD, (HOUSING/MOUNTING PLATE) IF PRESENT.

@ 0.5mA 50 Hz OR 60 Hz A MINUTE

MECHANICAL:



1. RETENTION STRENGTH:50N MIN. FOR 60S±5S
2. OPERATING LIFE:750 CYCLES MIN.
3. INSERTION FORCE:30N MAX.

ENVIRONMENTAL:

1. OPERATION: -25℃~+55℃ GB 10753-89
2. STORAGE:-10℃~+40℃ RELATIVE HUMIDITY<80%, GB 10753-89
3. STORAGE TIME:12 MONTHS
4. SALT SPRAY TEST:SEE TABLE

CHARACTERISTICS:

PLUG WILL ACCEPT 23 OR 24 AWG SOLID WIRE HAVING A MAXIMUM INSULATION DIAMETER OF 0.97~1.07 MM

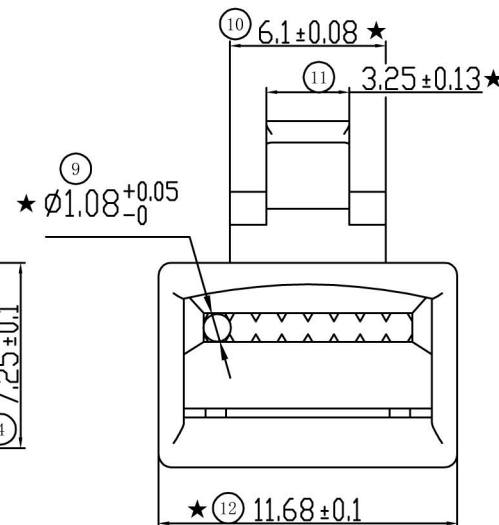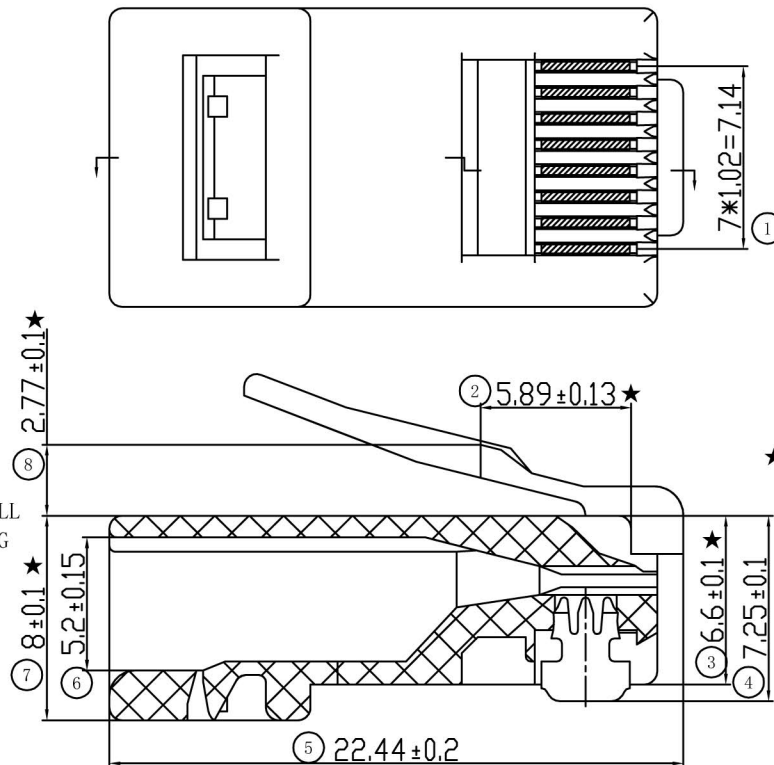

- ★: 尺寸标示重点尺寸;
○: 尺寸表示SPC管控尺寸, 有CPK要求;
○: 尺寸表示参考尺寸;
□: 尺寸表示理论尺寸, 为其他尺寸的测量位置提供参考。