


PTF08A



PTF08A







Specification

| | | | |
|----------------------------|---------------------|---------------|--------|
| Rated load | Current / Voltage | A/VAC | 10/300 |
| Dielectric strength | Coil/Contact | V/S | 2000 |
| | Between contacts | V/S | 2000 |
| External connection wire | AWG/mm ² | 20-16/0.5-1.5 | |
| Screw torque | Nm | 0.7 | |
| Terminal protection degree | | | |


Matched relay

| Socket model | Relay model | Metal Clip | Module | DIN clip |
|--------------|----------------|------------|--------|----------|
| PTF08A | LY1 | K-35S | | |
| | LY2 | | | |
| | 56.02 | | | |
| | 58.02 | | | |
| | JQX-13F 2Z 10A | | | |

Outline dimension, Wiring diagram

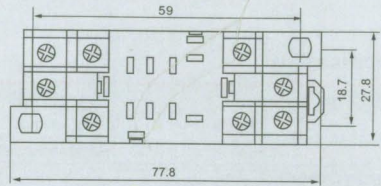

PTF08A-E



PTF08A-E



Specification

| | | | |
|----------------------------|---------------------|---------------|--------|
| Rated load | Current / Voltage | A/VAC | 10/300 |
| Dielectric strength | Coil/Contact | V/S | 2000 |
| | Between contacts | V/S | 2000 |
| External connection wire | AWG/mm ² | 20-16/0.5-1.5 | |
| Screw torque | Nm | 0.7 | |
| Terminal protection degree | | | IP20 |

Matched relay

| Socket model | Relay model | Metal Clip | Module | DIN clip |
|--------------|----------------|------------|--------|----------|
| PTF08A-E | LY1 | K-35S | | |
| | LY2 | | | |
| | 56.02 | | | |
| | 58.02 | | | |
| | JQX-13F 2Z 10A | | | |

Outline dimension, Wiring diagram

