

MODEL NO. : MLL-50531

■Features:

- HIGH EFFICIENCY, LOWPOWER CONSUMPTION LED.
- PEAK WAVELENGTH IS 590nm
- 25 DEGREE VIEW ANGLE

■Applications:

- DIRECT LIGHT ONLY

Dics Material	Light Color	Lens Color
GaAsp	Yellow	Yellow Diffused

Absolute Ratings

(Ta=25°C)

Item	Symbol	Maximum	Unit
Power Dissipation	P _D	80	mW
Continuous Forward Current	I _F	20	mA
Peak Forward Current (1/10 Duty Cycle 0.1ms Pulse Width)	I _{FP}	100	mA
Reverse Voltage	V _R	5	V
Derating Linear Form 25°C		0.21	MA/°C
Operating temperature Range	Topr	-25 to +100	°C
Storage Temperature Range	Tstg	-40 to +100	°C

****Condition for IFP is pulse of 1/10 duty and 0.1 msec width.**

****Solder temperature 1.6mm from body for 5 seconds at 250°C +/-5°C.**

CHARACTERISITIC

(Ta=25°C)


Item	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V _F	IF=20mA		2.2	2.5	V
Reverse Current	I _R	VR=5V			10	uA
Peak Emission Wavelength	λ _p	IF=20mA		590		nm
Viewing Angle	2θ _{1/2}	IF=20mA		25		Deg
Luminous Intensity	I _V	IF=20mA	15	30		mcd

MODEL NO. : MLL-50531

◆ **Package Dimensions (Unit: mm)**

P8-1-1

1 Cathode
2 Anode

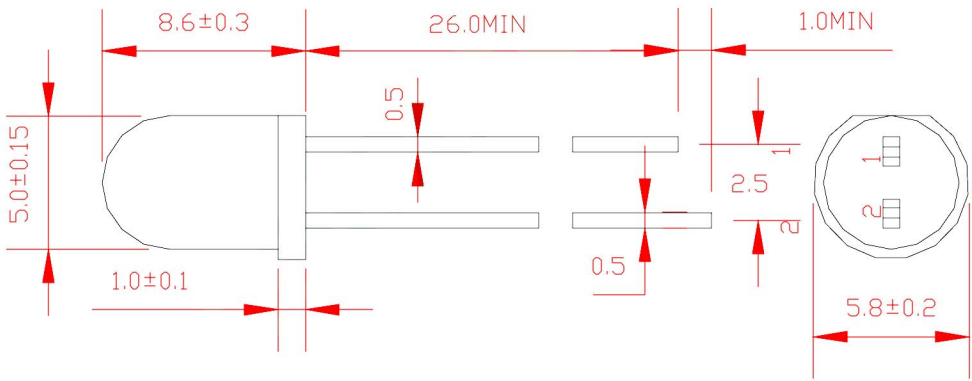

Protruded resin under flange 1.0mm MAX

MODEL NO. : MLL-50531

◆ Typical Optical-Electrical Characteristic Curves

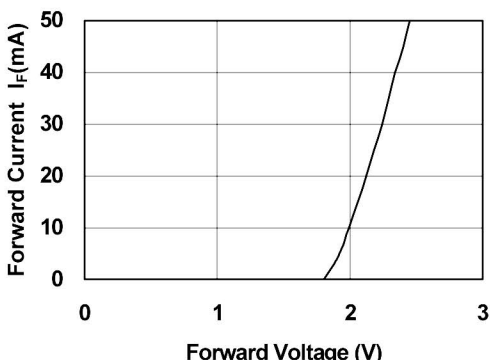


FIG1. FORWARD CURRENT VS. FORWARD VOLTAGE

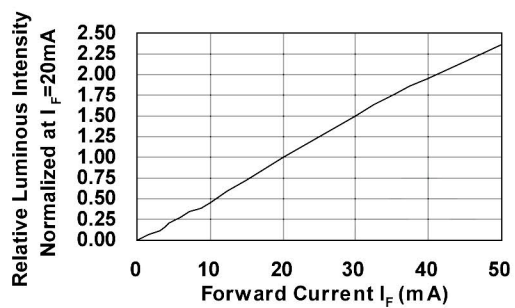


FIG2. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

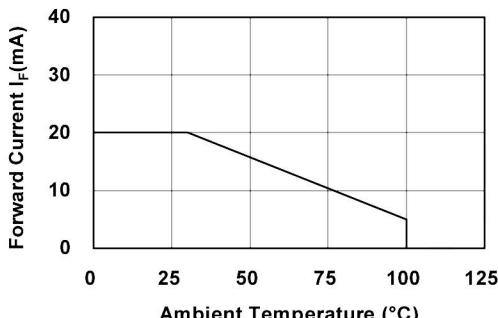


FIG3-26. FORWARD CURRENT VS. AMBIENT TEMPERATURE

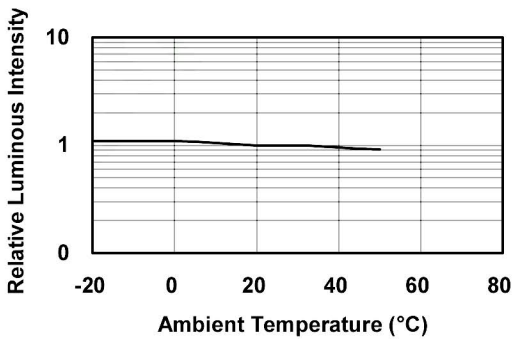


FIG4. LUMINOUS INTENSITY VS. AMBIENT TEMPERATURE

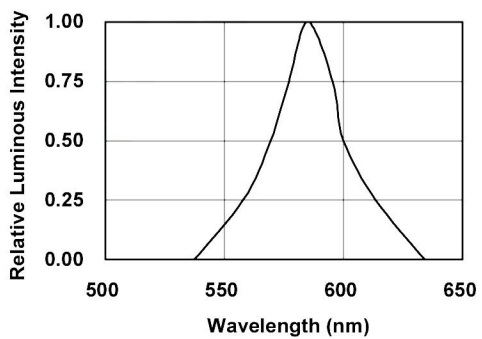


FIG5. RELATIVE INTENSITY LUMINOUS VS. WAVELENGTH

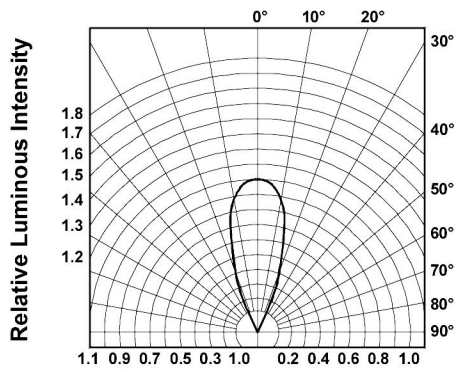


FIG6-46. SPATIAL DISTRIBUTION