



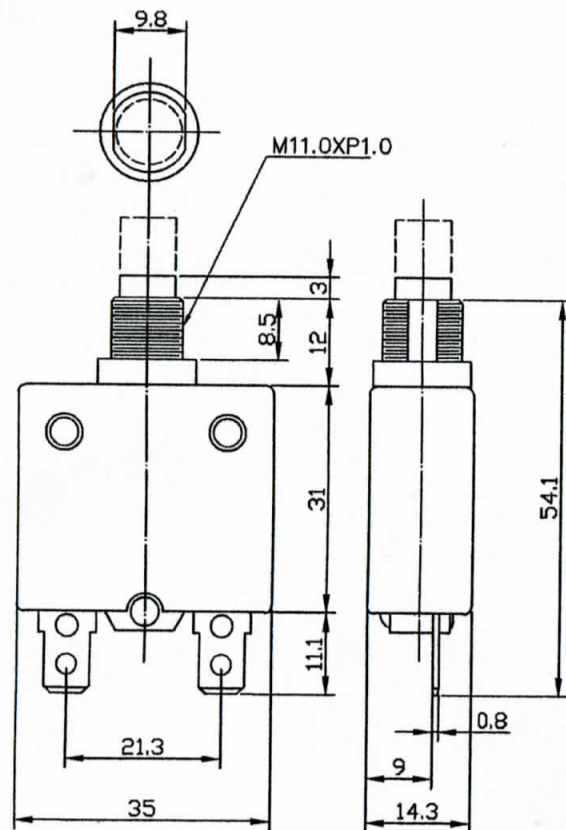

Specifications :

- *Standard Rating : 3~50 AMPERE.
- *Input Power : 125 VAC / 250 VAC / 50 VDC.
- *Dielectric Strength : 1500 VAC / 1 Minute.
- *Interrupt Capacity : 125 VAC x 1000 A, 250 VAC x 2000A.
- *Insulation Resistance : > 100 MΩ
- *Calibration : 25°C-100% of Rated Current-Continuously Carried.
 25°C-Between 101% to 145%-May Trip or Not.
 25°C-150% of Rated Current-Trip Within 1 Hour.
 25°C-200% of Rated Current-Trip Within 1 Minute.
- *Contact Endurance :
 125 VAC x 150% of Rated Current-500 Cycles.
- *Reset : Manual Push Reset/Auto Reset.

TERMINAL

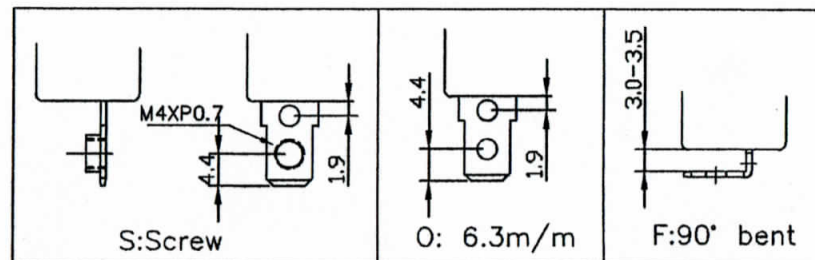

RoHS COMPLIANT

APPROVED BY



Date: APR 06 2016

UNITED AU-VI CO., LTD.

Description:

Part No.:

CB-8420

CIRCUIT BREAKER 3A-50A

ULTIMAX®
 THE ULTIMATE ELECTRONIC COMPONENTS

File No.: ZE-700-MH