




SA-22 Flashlight

Specifications

Dimensions: 37 mm (HD)*169 mm(L)*35mm(TD)

Weight : 110g (Without battery)

Accessories: Tactical parachute-cord, Spare O-ring, holster, User manual.

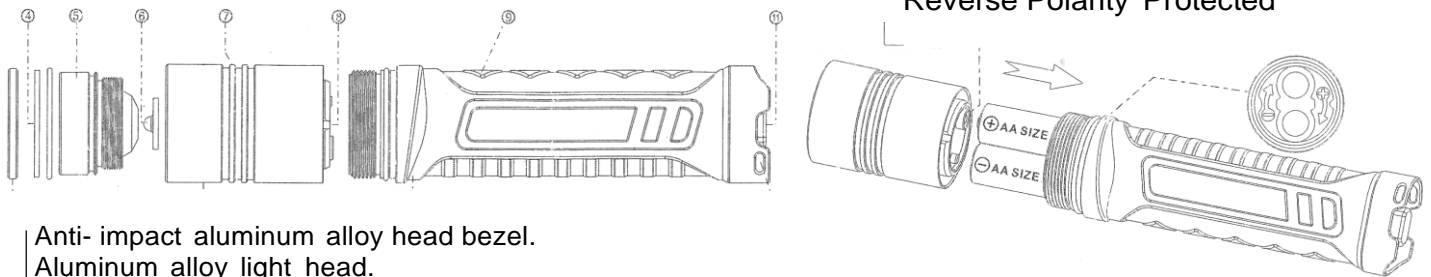

Anti-impact aluminum alloy head bezel.

Aluminum alloy light head.

Polyamide (PA.66) battery tube, impact-resistant and light weight, provide decent hand grip.

Anti-impact tempered glass lens

Special designs light metal reflector, provides wonderful beam shot.

One CREE Xlamp XM-L2 U2 LED.

Type II h8rd anodize surface finish, deep groove heat sink fins.

Built-in digital control circuit. ®Anti-rolling and anti-slip body design.

Enlarged lanyard penetrating hole, more convenient for use.

ON/OFF lock-on tail button switch .

Fully pressing the switch to turn on the flashlight.

Click the switch to access to different brightness modes : High-Middle-Low-Strobe-SOS.

Remarks : Please refer to the diagram to install batteries.

Available for 4 pieces disposable AA batteries, or Ni-MH rechargeable batteries.

Flashlight is a high brightness output device which can generate a lot of heat in continuously using. So, please read the operating manual and the following warnings/ recommendations carefully for safety usage.

1. DO NOT leave your flashlight unattended.
2. Keep your flashlight beyond the reach of children.
3. DO NOT shine the flashlight directly to the eyes of animals or people.
4. DO NOT use rechargeable Li-ion batteries without protective circuits.
5. Remove batteries for long periods of inactivity or during transportation.
6. Twice a year clean the threads with a clean cloth and apply thin coat of silicon-based lubricant to them.
7. DO NOT use petroleum-based lubricant on the waterproof O-rings, which may cause damages to the O-ring.
8. IPX-8 waterproof rating.



ON-OFF / High-Middle-Low-Strobe-SOS